

NEW! The panel labelling system allows you to label panels before they are cut

Clearly labelled parts are a must for smooth production processes. The new panel labelling system HFE 200 allows your saw-store combination to deal with the labelling work before the first part is produced. This new development labels the panel before it is cut, irrespective of the saw, during non-productive time that previously went unused.

Available as stand-alone solution for all HOLZMA saws and – even faster and unbeatably compact – in combination with the new feed-stacking table for the profiLine models.


A company of the HOMAG Group



HOLZMA Plattenaufteiltechnik GmbH Holzmastrasse 3 75365 CALW-HOLZBRONN

Tel.: +49 7053 69-0

Efficiency boost with panel labelling system and feed-stacking table

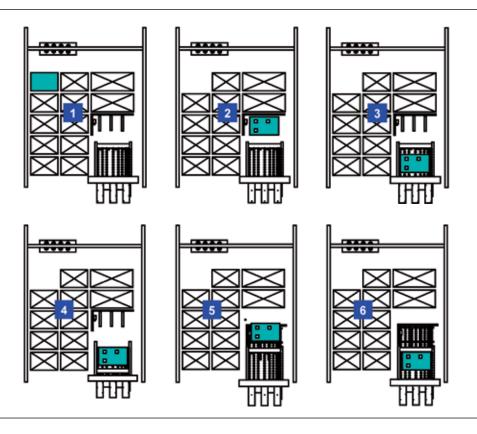



Technical data	HFE 200
Performance	up to 10 labels per minute
Panel length	max. 4300 and min. 1200 mm
Panel width	max. 2 200 and min. 800 mm
Panel thickness	max. 45 mm
Smallest part size that can be labelled	170 x 170 mm

This is how it works

Stand-alone solution for all HOLZMA saws

The automatic storage unit fetches the panel | 1, lifts it onto the panel labelling unit | 2 and then places the labelled panel in the saw, in front of the program fence | 3.

Stand-alone solution for all HOLZMA profiLine saws

Steps 1 and 2 are identical. The difference: the storage unit places the panel, after it has been labelled, behind the program fence, while a panel is still being cut at the front |4. That saves time. Thanks to its clamps, which can be raised and lowered, the program fence simply moves back over the panel and fetches it at the right moment.

profiLine solution including feedstacking table with integrated infeed

The combination of panel labelling system and feed-stacking table with integrated infeed, available for profiLine saws, provides more speed and more flexibility.

What is special about it is that the panel labelling system is located above the feed-stacking table. This saves space, reduces the distances to be covered and allows even faster labelling.

- The panel is placed directly on the feed-stacking table, located behind the saw, and labelled by the panel labelling system, which is erected over this table |5.
- Here, too, the program fence moves back over the panel and fetches it just in time |6.

Your benefits

The panel labelling system with feedstacking table and integrated infeed:

- ensures smooth production without interruptions
- turns dead time into value-adding time
- optimises handling when destacking all the parts are already labelled
- saves time, space and money by improving efficiency

A company of the HOMAG Group



HOLZMA Plattenaufteiltechnik GmbH

Holzmastrasse 3 75365 CALW-HOLZBRONN

Tel.: +49 7053 69-0