



Surface Planer


**SICAR**  
**CLASSIC**

Pialla A Filo Surface Planer Abriehobelmaschine Dégauçisseuse Cepilladora		RAPID 310	RAPID 330	RAPID 400E	RAPID 500E
Larghezza dei piani Width of table Breite der Arbeitstische Largeur des tables Ancho de las mesas	mm	310	330	400	500
Lunghezza dei piani Length of table Länge der Arbeitstische Longueur des tables Longitud de las mesas	mm	2140	2400	2500	2600
Asportazione max. Max. depth of cut Max. Spanabnahme Max. asportation Max. arrancamiento	mm	12	18	18	18
Profondità di battuta Depth of shoulder Falztiefe Profondeur de coupe Profundidad max. de golpe	mm	12	18	20	20
Velocità rotazione albero Cutterhead rotating speed Drehgeschwindigkeit der Hobelwelle Vitesse de rotation de l'arbre Velocidad de rotación del eje	giri/1' r.p.m. UPM T/1' r.p.m	5000	5000	5000	5000
Diametro dell'albero porta coltelli Planer shaft ø Hobelwelle Diamètre de l'arbre dégauchisseuse Diametro del eje	mm	105	116	116	116
Coltelli Number of knives Messeranzahl Nombre des couteaux Numero de cuchillas	n	4	4	4	4
Motore Motor Motorstärke Moteur Motor	KW (HP) KW (HP) KW (PS) KW (CV) KW (CV)	2,2 (3)	2,2 (3)	3 (4)	4 (5,5)
Guida inclinabile Fence tilting up to Verstellung des Winkels bis Equirre inclinable Inclinación de la guía hasta	mm	45°	45°	45°	45°
Peso netto Net weight Netgewicht Poids net Peso neto	mm	360	390	550	610
Peso lordo in cassa Gross weight in wooden case Brutto Gewicht mit kasse Poids brut en caisse Peso bruto en caja	mm	480	510	695	760
Volume Volume Volumen Volume Volumen	mm <sup>3</sup>	1,46	1,59	1,98	2,24

Dotazioni standard Accessoires standard Standard-Zubehör Accessoires standard Accesorios standard	RAPID 310	RAPID 330	RAPID 400E	RAPID 500E
Protezione albero pialla Planer shaft guard Hobelwellenschutz Protection arbre rabot Protección eje cepillo	•	•	•	•

Accessori a richiesta Optional accessories Zuberhör auf verlangen Accessoires en option Accesorios opcionales	RAPID 310	RAPID 330	RAPID 400E	RAPID 500E
Gruppo cavatrice con affila coltelli e mandrino Westcott 0-16 mm Mortising attachment with knife sharpener and 0-16 mm. Westcott chuck Langlochbohrereinrichtung mit Messerschleifvorrichtung mit Westcott-Bohrfutter 0-16 mm Groupe mortaiseuse avec affûtecouteaux et mandrin Westcott 0-16 mm Dispositivo de taldrar con affila cuchillas con porta brocas Westcott 0-16 mm	•	•	•	•
Pianetto per battuta Rabbing capacity bracket Kleine Tisch für Anschlag Table pour le feuilleure Mesa a golpear	•	•	•	•
Cappa di aspirazione ø 150 Suction dust hodd ø 150 Absaughauben ø 150 Hotte d'aspiration ø 150 Bocca aspiración ø 150	•	•	•	•
Protezione " SUVA " " SUVA " tipy protection " SUVA " Schutz Protection " SUVA " Proteccion " SUVA "	•	•	•	•
Piani rettificati Polished table Geschliffener Arbeitsfläche Table rectifiées Mesa rectificadas	•	•	•	•
Guida ribaltabile per lavorazione pezzi sottili Overturnable fence to work thin pieces Klappbare Führung zur Bearbeitung dünner Guide basculant pour usinage pieces fines Guja vuelcante para el trabajo de piezas sutiles	•	•	•	•
Dispositivo elettrico a norme Electric equipment as per Europe standards Elektrische Anlage nach Equipement électrique aux normes Dispositivo elettrico segun normativa	•	•	•	•
Motore maggiorato Increased Motor für Moteur plus puissant Motor con potencia superior	•	•	•	•
Dispositivo autofrenante ( 10° ) Selfbraking device ( 10° ) Selbstbremsende Vorrichtung ( 10° ) Dispositif autofreinant ( 10° ) Dispositivo autofrenante	•	•	•	•
Albero pialla " Tersa " " Tersa " planer shalf Hobelwelle " Tersa " -System Arbre rabot " Tersa " Eje cepillo " Tersa "	•	•	•	•

Dimensioni di imballo  
Packing dimensions  
Abmessungen der Verpackung  
Dimensions di emballage  
Dimensiones de anclaje

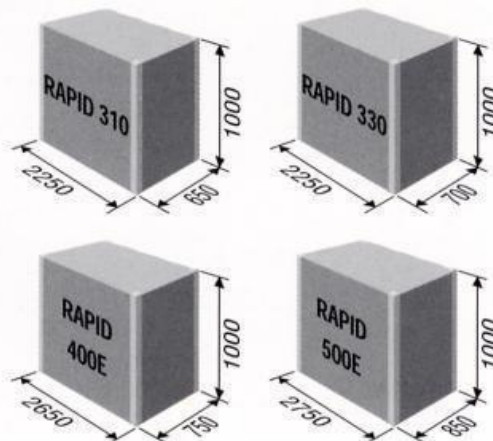

## SICAR 12" Jointer

### MODEL: RAPID 310

3.6 HP, 220V, 3Ph Motor

or

3.6 HP, 220V, 1Ph Motor



#### **STANDARD EQUIPMENT:**

Magnetic Starter w/Overload Protection  
Self-Braking Motor (3 Phase Version Only)  
Four Knife Cutter Head  
High Precision Tilting Fence  
Metal, Boomerang Cutter Head Guard  
Adjustable & Lockable In feed & Out Feed Tables  
Emergency Stop  
Knife Setting Gauge w/Standard Head  
Operations Manual, Parts List & Tool Kit

#### **OPTIONAL EQUIPMENT:**

Tersa Four Knife Cutter Head

#### **ELECTRIC & DUST REQUIREMENTS:**

12 AMPS @ 3Ph, 220V

21 AMPS @ 1Ph, 220V

1400 CFM

#### **WARRANTY:**

*One Year Electrical*

*One Year Mechanical*

#### **SPECIFICATIONS:** Meet CE Standards

Table Overall Length	2140mm (~85")
Table Infeed Length	mm (~")
Table Outfeed Length	mm (~")
Table Working Width	310mm (~12")
Table Height	820mm (~32")
Maximum Depth of Cut	18mm (~0.7")
Cutter Head Diameter	105mm (~4.2")
Cutter Head RPM	5000
Dimensions of Knives	310x30x3mm
Fence Dimensions	x mm (~ x ")
Fence Tilt (Degrees)	0 - 45
Shaving Hood Diameter	150mm (~6")
Net Weight	~825 lbs.
Gross Weight	~1050 lbs.
Machine Dimensions	2140x980x975mm (~85x39x38")
Crated Dimensions	2250x650x1000mm (~88x26x40")